


TORCH COMPONENT REFERENCE GUIDE

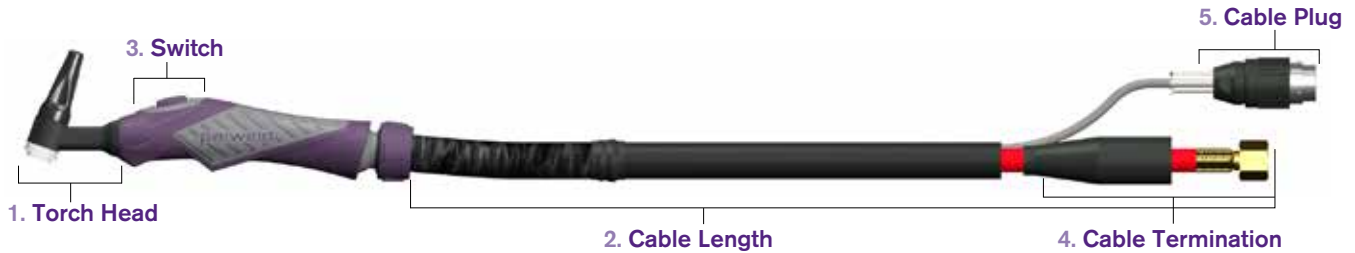

1. TORCH HEADS

Air Cooled		Water Cooled													
PRO9	125A DC, 100A AC @ 60% Duty Cycle 0.5mm-2.4mm (.020"-3/32") Electrodes	PRO20	250A DC, 190A AC @ 100% Duty Cycle 0.5mm-3.2mm (.020"-1/8") Electrodes												
OPTIONS	<table border="1"> <tr> <td>PRO 9</td> <td>PRO 9FXL</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Length: 53mm</td> <td>Length: 91mm</td> </tr> </table>	PRO 9	PRO 9FXL			Length: 53mm	Length: 91mm	OPTIONS	<table border="1"> <tr> <td>PRO 20</td> <td>PRO 20FXL</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Length: 56mm</td> <td>Length: 64mm</td> </tr> </table>	PRO 20	PRO 20FXL			Length: 56mm	Length: 64mm
PRO 9	PRO 9FXL														
Length: 53mm	Length: 91mm														
PRO 20	PRO 20FXL														
Length: 56mm	Length: 64mm														
PRO17	150A DC, 115A AC @ 60% Duty Cycle 0.5mm-2.2mm (.020"-1/8") Electrodes	PRO20HY	300A DC, 230A AC @ 100% Duty Cycle 0.5mm-3.2mm (.020"-1/8") Electrodes												
OPTIONS	<table border="1"> <tr> <td>PRO 17</td> <td>PRO 17FX</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Length: 76mm</td> <td>Length: 97mm</td> </tr> </table>	PRO 17	PRO 17FX			Length: 76mm	Length: 97mm	OPTIONS	<table border="1"> <tr> <td>PRO 20HY</td> <td>PRO 20HYFXL</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Length: 56mm</td> <td>Length: 64mm</td> </tr> </table>	PRO 20HY	PRO 20HYFXL			Length: 56mm	Length: 64mm
PRO 17	PRO 17FX														
Length: 76mm	Length: 97mm														
PRO 20HY	PRO 20HYFXL														
Length: 56mm	Length: 64mm														
PRO26	200A DC, 150A AC @ 60% Duty Cycle 0.5mm-4.0mm (.020"-5/32") Electrodes	PRO18	350A, DC, 260A AC @ 100% Duty Cycle 0.5mm-4.0mm (.020"-5/32") Electrodes												
OPTIONS	<table border="1"> <tr> <td>PRO 26</td> <td>PRO 26FX</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Length: 71mm</td> <td>Length: 71mm</td> </tr> </table>	PRO 26	PRO 26FX			Length: 71mm	Length: 71mm	OPTIONS	<table border="1"> <tr> <td>PRO 18</td> <td>PRO 18FX</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>Length: 64mm</td> <td>Length: 64mm</td> </tr> </table>	PRO 18	PRO 18FX			Length: 64mm	Length: 64mm
PRO 26	PRO 26FX														
Length: 71mm	Length: 71mm														
PRO 18	PRO 18FX														
Length: 64mm	Length: 64mm														
NEW PRO 20 HYBRID - PRO20HY Compact, lightweight torch with hybrid power cable for high power operation.		PRO18SC	400A, DC, 300A AC @ 100% Duty Cycle 0.5mm-4.8mm (.020"-3/16") Electrodes												
		OPTIONS	<table border="1"> <tr> <td>PRO 18SC</td> </tr> <tr> <td></td> </tr> <tr> <td>Length: 71mm</td> </tr> </table>	PRO 18SC		Length: 71mm									
PRO 18SC															
Length: 71mm															

2. CABLE LENGTH

CODE	DESCRIPTION
12	4m (12.5ft) Cable c/w Leather Cover, Neoprene Sheath
25	8m (25ft) Cable c/w Leather Cover, Neoprene Sheath